

### General Description

Series PWD00A-400 electronic module for driving open loop proportional valves is compact and easy to install with DIN rail mounting and plug-in terminals. The digital design allows for programmable parameters such as solenoid drive current, mins and maxs, and ramps. Profiles controlled by on-off logic signals can be configured through internal velocity setpoints and ramps. The module provides flexibility for different applications and repeatability from unit to unit. The module parameters are programmed with an RS-232 interface and user friendly software (ProPxD) with default values for the standard valves.



The PWD00A-400 module contains the functions required by typical open loop proportional valve applications (series D\*FB, D\*FW, D\*1FW, WLL, RLL valves).

### Features

- Programmable parameters.
- Analog or Profile Capability.
- RS-232 Interface.
- User friendly programming software.
- Plug-in terminals.
- Four independent ramps.

### Specifications

General			
<b>Model</b>	Module package for snap-on mounting on EN 50022 rail	<b>Mounting Position</b>	Any
<b>Package Material</b>	Polycarbonate	<b>Ambient Temperature Range</b>	-20°C to +60°C (-4°F to +140°F)
<b>Inflammability Class</b>	V2 to V0 acc. UL 94	<b>Protection Class</b>	IP 20 acc. DIN 40050
Electrical			
<b>Duty Ratio</b>	100%	<b>Channel Recall Signal</b>	Off – 0 to 5.0 VDC; On – 8.5 to 30 VDC; Ri = 30K ohm
<b>Supply Voltage</b>	18 VDC to 30 VDC, ripple < 5% eff., surge free (29 VDC to 30 VDC for 24V coils)	<b>Status Signal</b>	Off – 0 to 0.5 VDC; On – Supply Voltage; rated max. 15 mA
<b>Switch-on Current Typ.</b>	22A for 0.2 mS	<b>Adjustment Ranges</b>	<b>preset</b>
<b>Current Consumption Max.</b>	2.0A	Minimum	0 to 50%
<b>Pre-fusing</b>	2.5A medium lag	Maximum	50 to 100%
<b>Command Signal</b>	+10 to 0 to -10 VDC, ripple < 0.01 % eff., surge free, Ri = 150K ohm <b>Do not input a command greater than ±10 VDC.</b>	Ramp Time	0 to 32.5 s
<b>Input Signal Resolution</b>	0.025%	Zero Offset	+75 to -75%
<b>Differential Input Voltage Maximum</b>	30V for terminals 5 and 6 against PE (terminal 8)	Current	0.8/3.5/2.7/1.8/1.3 A
<b>Enable Signal</b>	Off – 0 to 5.0 VDC On – 8.5 to 30 VDC; Ri = 30K ohm	<b>Interface</b>	RS 232C, DSub 9p. male for null modem cable
		<b>EMC</b>	EN 50081-2, EN 50082-2
		<b>Connection</b>	Screw terminals 0.2 to 2.5 mm <sup>2</sup> , plug-in
		<b>Cable Specification</b>	16 AWG overall braid shield for supply voltage and solenoids 20 AWG overall braid shield for sensor and signal
		<b>Cable Length</b>	50m (164 ft.)

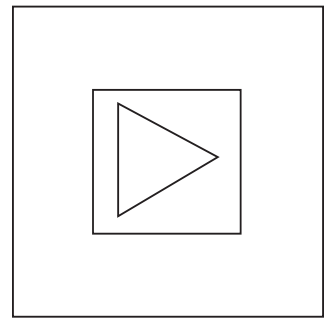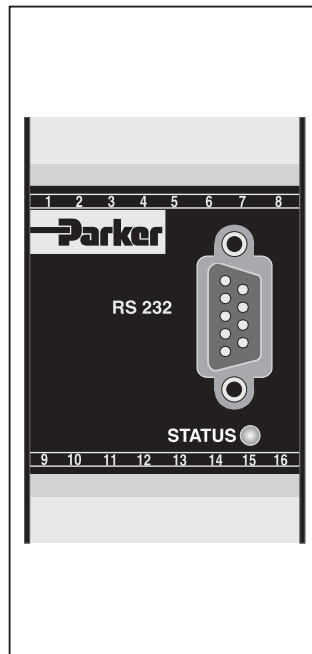


- Input Enable with Status indicator.
- Differential input on analog command.
- Compliant with European EMC Standards.




**D**


**Ordering Information**

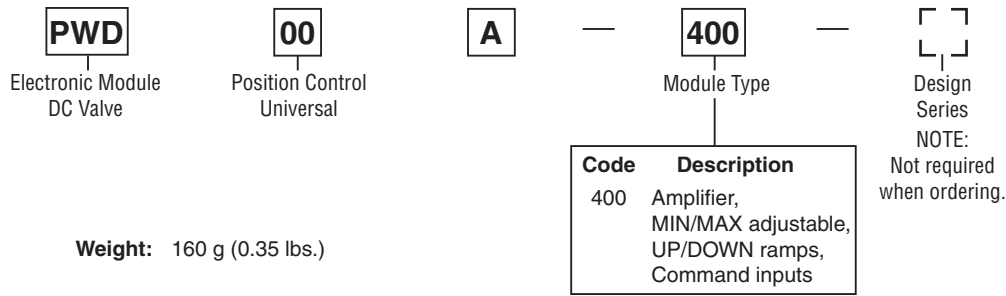

**Block Diagram — Wiring**

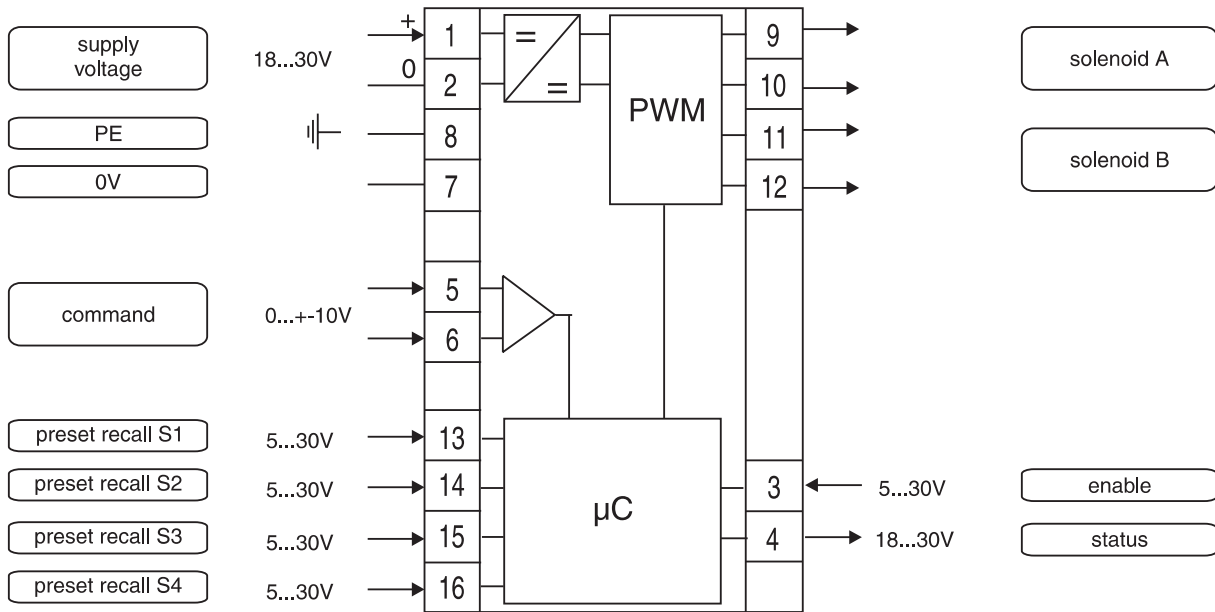


**Signal Flow Diagram**

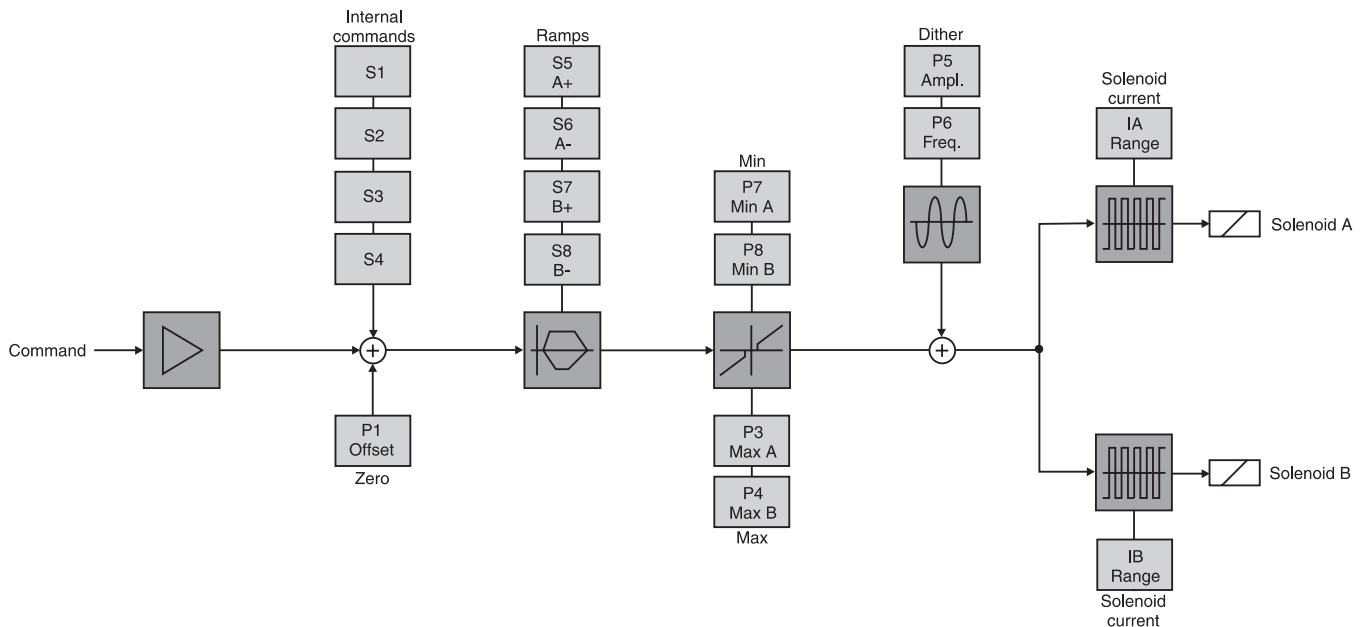

**Dimensions**

Inch equivalents for millimeter dimensions are shown in (\*\*)

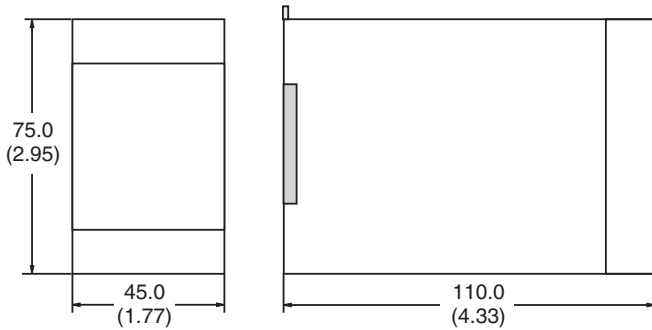

**ProPxD Interface Program**

The new ProPxD software permits comfortable parameter setting for the electronic module series PCD, PWD, PZD and PID.

Via the clearly arranged entry mask the parameters can be noticed and modified. Storage of complete parameter sets to floppy or hard disk is possible as well as printout or record as a text file for further documentation. Stored parameter sets may be loaded anytime and transmitted to the electronic module in the same manner as the basic parameters which are available for all usable valve series. Inside the electronic a nonvolatile memory stores the data with the option for recalling or modification.

**Features**

- User-friendly editing of all parameters.
- Storage and loading of optimized parameter adjustments.
- Executable with all Windows® operating systems from Windows® 95 upwards.
- Communication between PC and electronic via serial interface RS-232 and null modem cable.
- Simple to use interface program. Download free of charge [www.parker.com/euro\\_hcd](http://www.parker.com/euro_hcd) → **Services** → **downloads**

**D**

