


Product data sheet

Characteristics

BMXP342030

processor module M340 - max 1024 discrete +
256 analog I/O - Ethernet - CANopen

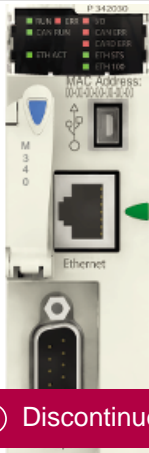

Commercial status

Discontinued on: 31 December 2010

End-of-service on: 31 December 2018

Main

Range of product	Modicon M340 automation platform
Product or component type	Processor module
Concept	CANopen Transparent Ready
Number of racks	4
Number of slots	11
Discrete I/O processor capacity	1024 I/O multi-rack configuration 704 I/O single-rack configuration
Analogue I/O processor capacity	256 I/O multi-rack configuration 66 I/O single-rack configuration
Number of application specific channel	36

Complementary

Control channels	Programmable loops
Motion control	Independent axis CANopen
Integrated connection type	USB port at 12 Mbit/s CANopen master bus SUB-D 9, transmission mode: 2 twisted shielded pairs at 20 kbit/s...1 Mbit/s Ethernet TCP/IP RJ45, transmission mode: 1 twisted pair at 10/100 Mbit/s
Communication module processor capacity	2 Ethernet communication module 4 AS-Interface module
Embedded communication service	Network management (NMT) CANopen Process Data Object (PDO) CANopen Service Data Object (SDO) CANopen Special functions (SYNC, EMCY, TIME) CANopen Bandwidth management, Ethernet TCP/IP Data Editor, Ethernet TCP/IP Modbus TCP messaging, Ethernet TCP/IP Rack Viewer, Ethernet TCP/IP SNMP network administrator, Ethernet TCP/IP
Port Ethernet	10BASE-T/100BASE-TX
Transmission rate	1 Mbit/s 0...20 m 0...0.6 m 125 kbit/s 0...500 m 0...10 m 20 kbit/s 0...2500 m 0...300 m 250 kbit/s 0...250 m 0...10 m 50 kbit/s 0...1000 m 0...120 m 500 kbit/s 0...100 m 0...10 m 800 kbit/s 0...40 m 0...6 m

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Bus type	CANopen M20 DS 301 V4.02 devices linked by daisy-chaining or tap junctions CSMA/CA CANopen M20 DS 303-2 devices linked by daisy-chaining or tap junctions CSMA/CA CANopen M20 DS 405 devices linked by daisy-chaining or tap junctions CSMA/CA
Number of slave	63 CANopen
Number of devices per segment	0...16 for <205 m (CANopen) 0...32 for <185 m (CANopen) 0...64 for <160 m (CANopen)
Memory description	Supplied memory card (BMXRMS008MP) backup of programs, constants, symbols and data Internal RAM 4096 kB Internal RAM 256 kB data Internal RAM 3584 kB program constants and symbols Supplied memory card (BMXRMS008MP) activation of standard web server, class B10
Maximum size of object areas	256 kB unlocated internal data 32634 %Mi located internal bits
Default size of object areas	1024 %MWi internal words located internal data 256 %KW constant words located internal data 512 %Mi located internal bits
Application structure	1 cyclic/periodic master task 64 event tasks No auxiliary task 1 periodic fast task
Execution time per instruction	0.12 µs Boolean 0.17 µs double-length words 0.25 µs single-length words 1.16 µs floating points
Number of instructions per ms	6.4 Kinst/ms 65 % Boolean + 35 % fixed arithmetic 8.1 Kinst/ms 100 % Boolean
System overhead	0.13 ms for fast task 0.7 ms for master task
Current consumption	135 mA at 24 V DC
Supply	Internal power supply via rack
Marking	CE
Status LED	1 LED (green)activity on Ethernet network (ETH ACT) 1 LED (green)integrated machine/installation bus operational (CAN RUN) 1 LED (green)processor running (RUN) 1 LED (green)status of Ethernet network (ETH STS) 1 LED (red)data rate (ETH 100) 1 LED (red)I/O module fault (I/O) 1 LED (red)integrated machine/installation bus fault (CAN ERR) 1 LED (red)memory card fault (CARD ERR) 1 LED (red)processor or system fault (ERR)
Net weight	0.215 kg

Environment

Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20
Protective treatment	TC
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2012/19/EU - WEEE directive
Product certifications	CE UL CSA RCM EAC Merchant Navy
Standards	EN 61131-2 EN/IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 and type 2 EN/IEC 61850-3, location G
Environmental characteristic	Hazardous location class I division 2

Packing Units

Package 1 Weight	0.249 kg
Package 1 Height	55.000 mm
Package 1 width	115.000 mm
Package 1 Length	115.000 mm

Contractual warranty

Warranty	18 months
----------	-----------

BMXP342030 is replaced by:

Standard environment BMXP3420302

processor module M340 - max 1024 discrete + 256 analog I/O - CANOpen

Qty 1

Reason for Substitution: End of life | Substitution date: 09 September 2009
