

Product data sheet

Characteristics

TSXEMF16DT2

discrete I/O module - 1 group of 8 inputs/2 groups of 4 outputs - 24 V DC - IP67

Price*: 1145.00 USD

Commercial status

This Product is Obsolete :

 This Product is Obsolete

Main

Range of product	Modicon Premium Automation platform
Product or component type	Discrete input/output module on Fipio
Discrete I/O number	16
Group of channels	1 group of 8 inputs 2 groups of 4 outputs
Discrete input number	8 EN/IEC 61131 type 2
Input compatibility	With 2-wire/3-wire proximity sensors

Complementary

Discrete input voltage	24 V DC
Discrete input logic	Positive
Discrete input current	7 mA
Sensor power supply	19.2...30 V
Voltage state 0 guaranteed	<= 5 V
Voltage state 1 guaranteed	>= 11 V
Current state 0 guaranteed	<= 2 mA
Current state 1 guaranteed	>= 6 mA 11 V
Response time	3.5 ms from state 0 to 1 on input 3.5 ms from state 1 to 0 on input
Power supply monitoring	14...18 V DC preactuator 14...18 V DC sensor
Discrete output number	8
Discrete output type	Solid state
Discrete output voltage	24 V DC
Output voltage limits	19.2...30 V
Discrete output current	0.5 A
Maximum output current	0.625 A 140 °F (60 °C) per channel 1.2 A 104 °F (40 °C) per group of 4 channels 2 A per group of 4 channels
Maximum leakage current	1 mA at state 0
[Ures] residual voltage	0.5 V at state 1 on output
Response time on output	< 0.5 ms resistive
Short-circuit protection	1.5 A by thermal circuit breaker on output 350 mA per 4 channels group on input
Output overload protection	1.5 A by thermal circuit breaker on output
Output overvoltage protection	By transil diode
Isolation between channels	None
Isolation voltage	500 V AC between bus and internal logic
Isolation between output channels group	60 Vrms AC
Isolation between channels and internal logic	60 Vrms AC
Isolation between input channel and output channel	60 V AC

Local signalling	Module operation and integrated communication 3 LEDs Channels status 16 LEDs Sensor power supply fault 1 LED Preactuator power supply 2 LEDs
Electrical connection	1 connector dust and damp proof male M23 for Fipio bus connctn, 24V DC power supply for sensor & internal electric of mod 1 connector male 7/8 inch for 2 24 V DC preactuators power supplies 8 connectors female M12 4 for connecting sensors and 4 for preactuators
Operating position	Any position
Marking	CE
Current consumption	80 mA 24 V DC 5 outputs at state 1
Net weight	1.19 Lb(US) (0.54 kg)

Environment

IP degree of protection	IP67
Weatherproofness level	Dust and damp proof
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Operating altitude	0...6561.68 ft (0...2000 m)
Shock resistance	15 gn 11 ms
Standards	DIN EN/IEC 61131 CNOMO
Product certifications	CSA UL Fipio

Ordering and shipping details

Category	22558-TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	03595862046824
Package weight(Lbs)	1.44 Lb(US) (0.653 kg)
Returnability	No
Country of origin	DE


Contractual warranty

Warranty	18 months
----------	-----------


IP 67 Module

Dimensions

Horizontal dimensions

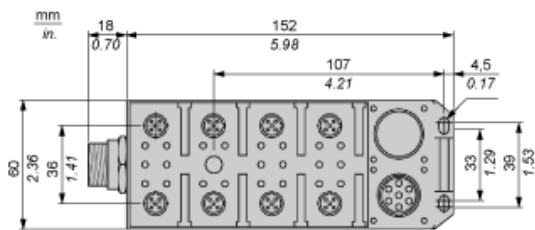


Vertical dimensions including TSXEFACC connector

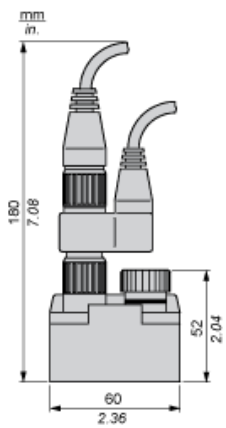


Installation Principles

The input or output modules can be mounted side-by-side, whilst maintaining a distance of 87 mm/3.42 in. in between the axes of consecutive modules.

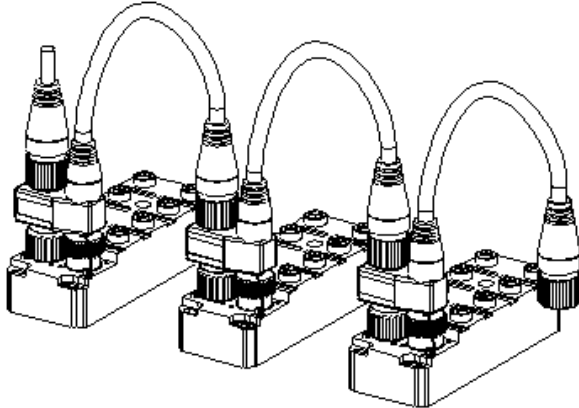


The use of a T connection for the output power supplies requires a minimum distance of 87 mm/3.42 in. in between two modules.

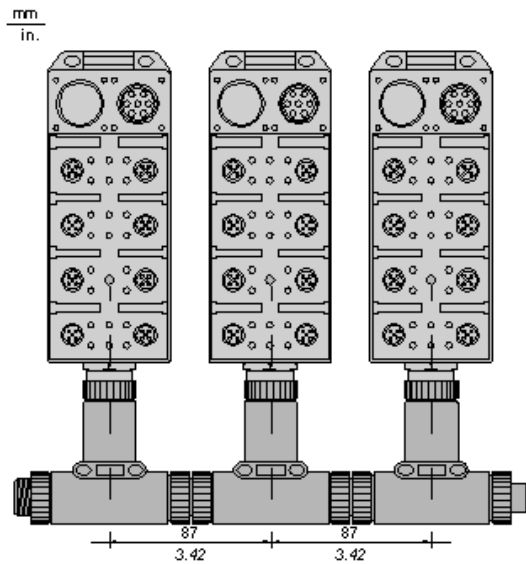


Mounting

Location of Drill Holes

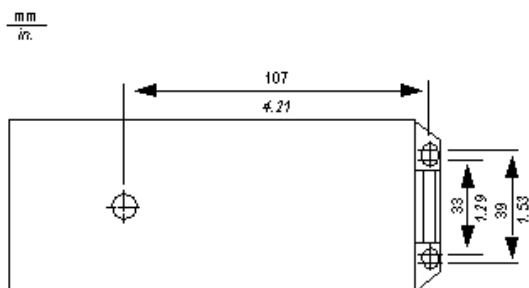

Connection of Module Inputs and Outputs

Each group of two inputs or two outputs of the module uses an M12 connector (two inputs or outputs per connector).

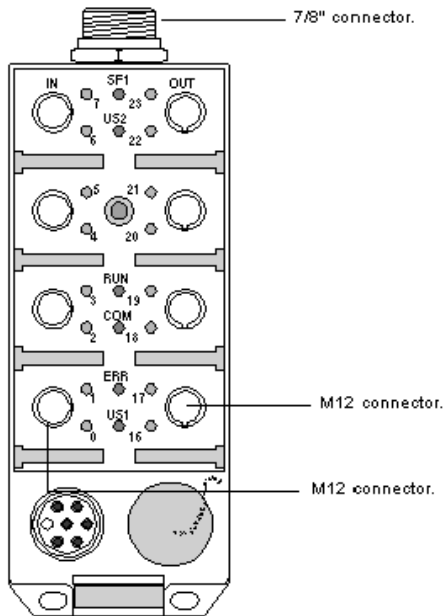


M12 connector (2 outputs)



1	Not Connected
2	Odd output
3	0 VDC
4	Even output
5	Ground

Actuator wiring:




M12 connector (2 inputs).




1	24 VDC
---	--------

2	Odd sensor input
3	0 VDC
4	Even sensor input
5	Ground


Mechanical contacts:



2-wire DDP:



3-wire DDP:



7/8" connector.



1	24 VDC (US1)
2	24 VDC (US2)
3	Ground
4	0 V (US1)
5	0 V (US2)

For the outputs to operate correctly, the two 24 VDC power supplies (US1 and US2) shall be connected to the module via the output power supply connector.

- the outputs 16, 17, 18 and 19 are powered by US1,
- the outputs 20, 21, 22 and 23 are powered by US2.

Product Life Status : **End of commercialisation**